

# RIDER

Time to **Reinvent** advance signal generation



## ARB Rider 5062(D)/5064(D)/5068(D) 5032D / 5034D / 5038D

### *Technical Datasheet*

**2 / 4 / 8 CHANNELS – ALL IN ONE:  
Function Generator, Arb Generator,  
Pulse Pattern Generator and Digital  
Pattern Generator.**

- 2, 4 or 8 Analog Channels
- 6.16 GS/s (12.32 GS/s in RF mode)
- 16 Bit Vertical Resolution
- Up to 6 GHz output frequency
- < 110ps Rise/fall time
- 230ps minimum pulse width
- Single ended output with up to 5 V<sub>p-p</sub> into 50 Ω with hardware offset of ±2.5V into 50 Ω. Total Output Voltage Window ±5 V (10 V<sub>p-p</sub>) into 50 Ohm
- Differential output with up to 3 V<sub>p-p</sub> into 100 Ω with common mode voltage of ±2 V into 50 Ω
- Up to 4 Gpts Waveform Memory per Channel
- Up to 32 Digital Channels in synchronous with analog Generation
- Multi-Instrument Synchronization: up to 32 analog and 128 digital channels

#### Key performance specifications

- **True Arb Mode**
  - 16-bit vertical resolution
  - 6.16 GS/s Variable Clock (12.32 GS/s in RF mode)
  - Up to 6 GHz output frequency
  - < 110ps Rise/fall time
  - 8bit, 16bit or 32bit digital channels
  - Up to 4 Gpts Waveform Memory per Channel
  - Single ended amplitude up to 5 V<sub>p-p</sub> into 50 Ω with hardware offset of ±2.5 V into 50 Ω
  - Differential amplitude up to 3 V<sub>p-p</sub> into 100 Ω load with common mode voltage of ±2 V into 50 Ω
- **AFG Mode**
  - 2 GHz Sine Waveforms
  - 6.16 GS/s fixed, 16-bit vertical resolution
  - Single ended amplitude up to 5 V<sub>p-p</sub> into 50 Ω with hardware offset of ±2.5 V into 50 Ω
  - Differential amplitude up to 3 V<sub>p-p</sub> into 100 Ω load with common mode voltage of ±2 V into 50 Ω
  - Improved proprietary DDS based technology
- **Pulse Pattern Generator (PPG) Mode - Optional**
  - Up to 1.5Gbit/s NRZ, RZ and R1 bit stream generation
  - 2,3 or 4 levels pattern
  - 64 point arbitrary shape per transition
  - Programmable duration for any transition
  - Up to 2Mbit (2 levels) or up to 1Msymbols (3 or 4 levels) pattern memory for channel
  - Single ended amplitude up to 5 V<sub>p-p</sub> into 50 Ω with hardware offset of ±2.5 V into 50 Ω
  - Differential amplitude up to 3V<sub>p-p</sub> into 100 Ω load with common mode voltage of ±2V into 50 Ω

## Features & Benefits

- Sample rate can be programmed in from 1 S/s up to 6.16 GS/s (12.32 GS/s in RF mode in 506x models only), with 16-bit vertical resolution, ensures exceptional signal integrity
- Arbitrary waveform memory up to 4 Gpts for each analog channel
- Mixed Signal Generation – 2, 4 or 8 Analog channels with 8, 16 or 32 synchronized Digital Channels for debugging and validating digital design.
- Three operation modes – Simple Rider AFG (DDS AFG mode), True Arb (variable clock Arbitrary AWG mode) and PPG (Pulse/Serial Pattern Generator).
- Digital outputs provide up to 1.54 Gb/s data rate in LVDS format. LVDS to LVTTTL adapter is available
- Advance sequencer with up to 16384 user defined waveforms provides the possibility of generating complex signal scenarios with the most efficient memory usage
- Windows based platform with 7in touch screen, front panel buttons and knob
- Compact form factor, convenient for bench top and fully fit with 3U – 19” rackmount standard
- LAN,USB-TMC and GPIB interfaces for remote control

## Applications and Area

### Automotive



Today's cars are including a lot of highly sophisticated electronic control unit with very sensitive electronic components. The Arb Rider 506x(D) and 503x (with x=2,4,8) combining up to 6.16 GS/s with 16-bits vertical resolution, represents an ideal tool for successfully addressing the new testing challenges in automotive.

- EMI debugging, troubleshooting and testing
- Electrical standards emulation up to 5V

### IoT and Ind 4.0 perfect RF Modulator



Arb and Function Riders will be the iconic instrument for these applications. The possibility to emulate complex RF I/Q modulation for simulation and Test vs wireless devices or working on Internet of things of industry 4.0 applications. Each engineer may use the possibility to import waveform to emulate devices under test, impose distortion on waveform (such noise) to test the ability of devices to be compliant to the standards.



**Research Applications**

Research centers and Universities, are key users of Arb Rider generator’s series.

Complex waveform and/or sophisticated Pulses emulation based on variable edges or multilevel could be perfectly created. The combination of fast edge generation, excellent dynamic range and easy to use user interface meet perfectly scientists and engineers working on Quantum Research or on large experiments such Accelerators, Tokamak or synchrotrons to emulate signals without creating specifics test boards.

- Emulation of detectors
- Emulation of signal sources adding noise
- Generation/playback of real-world signals
- Emulation of long PRBS sequences
- Modulating and driving laser diode

**Aerospace and Defense applications**

Electronic warfare signals driven by Radar or

Sonar systems perfectly match with these generators. Large BW Riders can be used on digital modulation systems for Radio Applications or others I/Q signal modulation.

Pulses may be easily generated for applications such Pulse Electron Beam or X Ray Sources, Flash X-ray Radiography, Lighting pulse simulators, high Power Microwave modulators.


- Frequency response, intermodulation distortion and noise-figure measurements
- Phase Locked Loop (PLL) pull-in and hold range characterization
- Radar base-band signals emulation

**Semiconductors Test**

Emulation of complex signals generated with inclusion of noise or distortions may became an excellent way to provide Compliance Components Test to help semiconductors engineers. The fast edges and pulse generation can be used to provide characterization in fast power devices.

**Simple Rider AFG: Function Generator Mode Interface**

Simple Rider AFG UI is designed for touch and it has been developed to put all the capabilities of modern Waveform Generators right at your fingertips. All instrument controls and parameters are accessed through an intuitive UI that recalls the simplicity of Tablets and modern smart phones: touch features and gestures are available to engineers and scientists to create advanced waveforms or digital patterns in few touches.

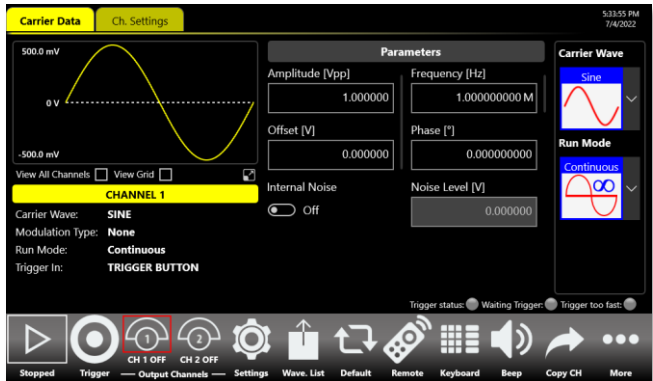

- The swipe gesture gives easy access to the output waveform parameters
- A touch-friendly virtual numeric keypad has been designed to improve the user experience on entering the data.
- Time saving shortcuts and intuitive icons simplify the instrument setup.



## Simple Rider TrueArb: True Arb Mode Interface

In **Simple Rider True-Arb** interface, the users can define complex waveforms with up to 16,384 sequence entries of analog waveforms and digital patterns, define their execution flow by means of loops, jumps and conditional branches.



Digital output combined and synchronized with analog output signals represent an ideal tool to troubleshoot and validate digital design.

The waveform memory length of up to 4 GSamples on each channel combined with up to 16,384 and up to 4,294,967,294 repetitions, make the Arb-Rider 506x(D) and 503xD (with x=2,4,8) the ideal generator for the most demanding technical applications.

Thanks to the intuitive and easy waveform sequencer user interface, the most complex waveform scenarios can be created with just few screen touches.

Up to 4 instruments can be synchronized together in order to obtain a 32 analog – 128 digital channel generator. A dedicated synchronization bus guarantees the intra-chassis synchronization.


Arb Rider supports the standard Ethernet interface for remote control and easy customized instrument programming.

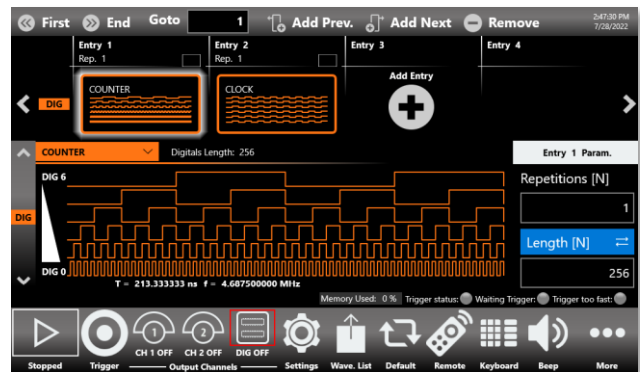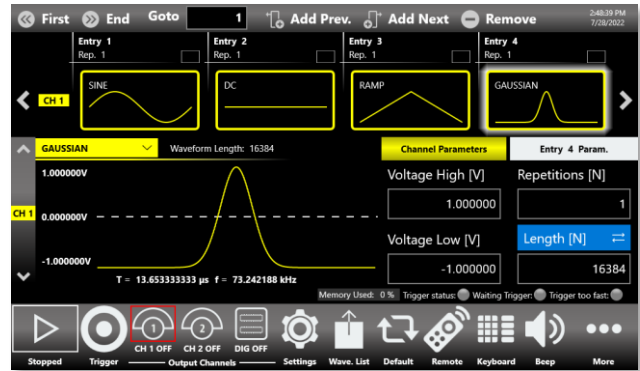

## Simple Rider PPG: Pulse Pattern Generator (PPG) Mode Interface

The easiest touch screen display interface allows to create patterns scenarios, only in a few screen touches.



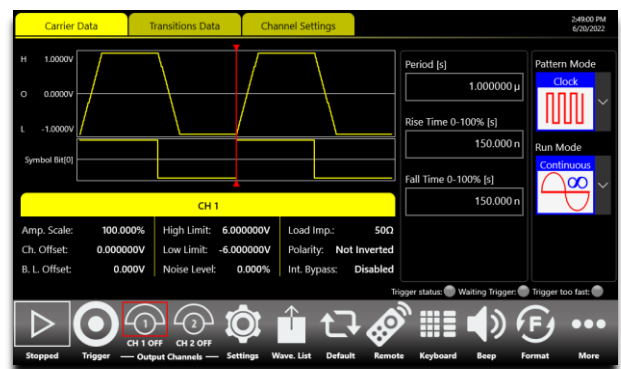


In summary the Pulse Pattern Generator provides the capability to generate PRBS patterns and up to 2MSymbols custom patterns where bit transitions can have arbitrarily user defined shapes. The ARB-RIDER-AWG5000 Pulse Pattern Generator can generate patterns up to 1.5Gbaud.



The software architecture provides the possibility to easily generate the patterns in different generation modality and also gives the opportunity to modulate the patterns with internal or external signals with the purpose to generate also different effects of noise (jitter, ripple, ...).



All specifications are typical unless noted otherwise. The guaranteed performances are referred to a calibrated instrument that has been stored for a minimum of 2 hours within the operating temperature range of 5°C to 40°C and after a 45-minute warm up period. Within ±10°C after auto-calibration

General Specifications			
<b>Operating Mode</b>	AFG Mode True Arb Mode SPG Mode		
<b>Number of Channels</b>	<b>AWG-5062</b> <b>AWG-5062D</b> <b>AWG-5032D</b> 	<b>AWG-5064</b> <b>AWG-5064D</b> <b>AWG-5034D</b> 	<b>AWG-5068</b> <b>AWG-5068D</b> <b>AWG-5038D</b> 
<b>Number of Channels</b> Analog Digital Markers	2  0/8 opt.  1	4  0/8/16 opt.  2	8  0/8/16/24/32 opt.  4
<b>Output Channels</b>	<b>AWG-5062</b> <b>AWG-5064</b> <b>AWG-5068</b> 		<b>AWG-5062D</b> <b>AWG-5064D</b> <b>AWG-5068D</b> <b>AWG-5032D</b> <b>AWG-5034D</b> <b>AWG-5038D</b> 
<b>Output Channels</b>			
Output type	Single ended DC coupled		Differential DC coupled
Output impedance	Single ended: 50 Ω		Single ended: 50 Ω Differential: 100 Ω
Connectors	SMA on front panel		





<b>DC Amplitude</b>		
Amplitude range	$\pm 2.5$ V (into 50 $\Omega$ )	$\pm 0.75$ V Se. (into 50 $\Omega$ ) $\pm 1.5$ V Diff. (into 100 $\Omega$ )
Resolution	100 $\mu$ V (nom), 5 digits	
Amplitude accuracy (guaranteed)	$\pm(1\%$ of  setting  + 5mV)	$\pm(1\%$ of  setting  + 2mV) <sup>1</sup>
<b>DC Baseline Hardware Offset (Common mode offset)</b>		
Resolution	< 4 mV or 4 digits	
Range (50 $\Omega$ into 50 $\Omega$ )	-2.5 V to +2.5 V	-2 V to +2 V
Range (50 $\Omega$ into High Z load)	-2.5 V to +2.5 V	-4 V to +4 V
Accuracy (50 $\Omega$ into 50 $\Omega$ ) (guaranteed)	$\pm (1\%$ of  setting  + 5 mV)	
<b>AC Accuracy</b> (1 kHz sine wave, 0 V offset, > 5 mV <sub>p-p</sub> amplitude, 50 $\Omega$ load) (guaranteed)	$\pm (1\%$ of setting [V <sub>pp</sub> ] + 5mV) <sup>1</sup>	

## True Arb - Baseband mode specifications

	<b>AWG-5062</b> <b>AWG-5064</b> <b>AWG-5068</b>	<b>AWG-5062D</b> <b>AWG-5064D</b> <b>AWG-5068D</b>  <b>AWG-5032D</b> <b>AWG-5034D</b> <b>AWG-5038D</b>
<b>General specifications</b>		
Operating Mode	Variable clock (True Arbitrary) – Baseband mode	
Sample Rate	1 S/s to 6.16 GS/s (AWG-506x/506xD, x = 2,4,8) 1 S/s to 3 GS/s (AWG-503xD, x = 2,4,8)	
Sin(x)/x -3dB bandwidth	2.72 GHz @ 6.16GS/S (AWG-506x/506xD) 1.32 GHz @ 3 GS/S (AWG-503xD)	
Run Modes	Continuous, Triggered Continuous, Single/Burst, Stepped, Advanced	

<sup>1</sup> The specification is guarantee in the range 0% to 90% of full sale output



Vertical Resolution	16 bit	
Max Waveform Length	2G samples per channel (4G samples optional)	
Waveform Granularity	1 if the entry length is > 416 samples 32 if entry length is ≥ 128 and ≤ 416 samples	
Sequence Length	1 to 16384	
Sequence Repeat Counter	1 to 4294967294 or infinite	
<b>Timer</b>		
Range	20 ns to 1.39 seconds	
Resolution	± 1 sampling clock cycle	
<b>Analog Channel to Channels skew</b>		
Range	0 to 2.63 us	
Resolution	100 fs	
Accuracy	±(1% of setting + 20 ps)	
Initial skew	< 20 ps	
<b>Calculated bandwidth (0.35 / rise or fall time)</b>	≥ 2 GHz	≥ 2.2 GHz (AWG-506xD) ≥ 1.1 GHz (AWG-503xD)
<b>SFDR @ 100 MHz <sup>2</sup></b> Measured across DC to Fs/2 where Fs is: Fs= 6.16 Gsa/s for AWG-506x(D) models Fs= 3 Gsa/s for AWG-503xD models	< -80 dBc	< - 90 dBc
<b>SFDR <sup>2</sup></b> Measured across DC to Fs/2 where Fs is: Fs= 6.16 Gsa/s for AWG-506x(D) models Fs= 3 Gsa/s for AWG-503xD models	1μHz to ≤ 600MHz: < -80dBc 600MHz to ≤ 1.5GHz: < -75dBc 1.5GHz to ≤ 2GHz: < -65dBc 2GHz to ≤ 3GHz: < -55dBc	1μHz to < 100MHz: < -90dBc 100MHz to ≤ 600MHz: < -82dBc 600MHz to ≤ 1.5GHz: < -75dBc 1.5GHz to ≤ 2GHz: < -70dBc 2GHz to ≤ 3GHz: < -62dBc

<sup>2</sup> Measured excluding Fs - 2\*fout and Fs- 3\*fout and excluding harmonic.



<b>Rise/fall time</b> (1 V <sub>p-p</sub> single-ended 10% to 90%)	≤ 175 ps	≤ 155 ps (AWG–506xD) ≤ 320 ps (AWG – 503xD)
<b>Rise/fall time</b> (1 V <sub>p-p</sub> single-ended 20% to 80%)	≤ 110 ps	≤ 100 ps (AWG–506xD) ≤ 200 ps (AWG–503xD)
<b>Overshoot</b> (1 V <sub>p-p</sub> single-ended)	<5%	<6%
<b>Random jitter on clock pattern</b> (rms, typical)	< 2 ps	

### True Arb - RF Mode specifications *(optional for AWG–506x/506xD only)*

	AWG-5062 AWG-5064 AWG-5068	AWG-5062D AWG-5064D AWG-5068D
<b>General specifications</b>		
Operating Mode	Variable clock (True Arbitrary) – RF mode	
Output Sample Rate	8.5 GS/s to 12.32 GS/s	
Sin(x)/x	5.04 Ghz @ 12.32GS/S	
RF Modulation	I/Q quadrature	
RF Carrier count per output channel	Single Carrier (2 components I0,Q0 for channel) Double Carrier (4 components, I0,Q0 and I1,Q1 for channel)	
RF Carrier Frequency range	0 up to 6 GHz	
RF Carrier Frequency resolution	1 mHz	
RF Carrier Phase	Programmable	
I/Q Component Data Rate	1/8 of the Output Sample rate	
I/Q Component Prescaler	0 to 2 <sup>32</sup>	
Run Modes	Continuous, Triggered Continuous, Single/Burst, Stepped, Advanced	





I/Q Component Vertical Resolution	16 bit
I/Q Component Waveform Length	32M to 500M samples for component (up to 1G samples optional)
I/Q Component Waveform Granularity	1 if the entry length is > 104 samples 8 if entry length is ≥ 32 and ≤ 104 samples
Sequence Length	1 to 16384
Sequence Repeat Counter	1 to 4294967294 or infinite
<b>Timer</b>	
Range	20 ns to 1.39 seconds
Resolution	± 1 Component sampling clock cycle
<b>I/Q Component to Component skew</b>	
Range	0 to [16200 * 8/Output Sampling Clock] s
Resolution	[8/Output Sampling Clock] s
Accuracy	±(1% of setting + 20 ps)
Initial skew	< 20 ps

## AFG Mode Specifications

	<b>AWG-5062</b> <b>AWG-5064</b> <b>AWG-5068</b>	<b>AWG-5062D</b> <b>AWG-5064D</b> <b>AWG-5068D</b>  <b>AWG-5032D</b> <b>AWG-5034D</b> <b>AWG-5038D</b>
<b>General Specifications</b>		
<b>Amplitude</b>		
Range	0 to 5Vpp (into 50 Ω)	0 to 3Vpp Diff. (into 100 Ω) 0 to 1.5Vpp Se. (into 50 Ω)
Resolution	100μV (nom), 5 digits	
Operating mode	DDS mode	



Standard Waveforms	Sine, Square, Pulse, Ramp, more (Noise, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine)	
Run Modes	Continuous, modulation, sweep, burst	
Arbitrary Waveforms	Vertical resolution: 16-bit Waveform length: 16,384 points	
<b>Internal Trigger Timer</b>		
Range	10.4 ns to 88 s	
Resolution	80 ps	
Accuracy	±(0.1% setting + 5 ps)	
<b>Sine Waves</b>		
Frequency Range Sine (50 Ω into 50 Ω) <sup>3</sup>	1 μHz to ≤ 1 GHz: 5Vpp 1 GHz to ≤ 2 GHz: 4Vpp	AWG–506xD: 1 μHz to ≤ 2 GHz: 3Vpp Diff. 1 μHz to ≤ 2 GHz: 1.5Vpp Se.  AWG–503xD: 1 μHz to ≤ 1 GHz: 3Vpp Diff. 1 μHz to ≤ 1 GHz: 1.5Vpp Se.
Flatness	DC to 2 GHz: ±0.5 dB (1 Vpp, relative to 1 kHz)	AWG–506xD: DC to 2 GHz: ±0.5 dB (1 Vpp diff., relative to 1 kHz)  AWG–503xD: DC to 1 GHz: ±0.5 dB (1 Vpp diff., relative to 1 kHz)
Harmonic Distortion (1 V <sub>p-p</sub> )	1μHz to ≤ 20kHz < -75dBc 20kHz to ≤ 400MHz < -70dBc 400MHz to ≤ 1GHz < -60dBc 1GHz to ≤ 2GHz < -55dBc	-

<sup>3</sup> Amplitude doubles on HiZ load



Total Harmonic Distortion (1 V <sub>p-p</sub> )	10 Hz to 20 kHz < 0.05%	-
Spurious (measured across DC to 3.08GHz for AWG-506x/606xD models and DC to 1.5GHz for AWG-503x models) <sup>4</sup>	1μHz to ≤ 500MHz: < -75dBc 500MHz to ≤ 1.5GHz: < -70dBc 1.5 GHz to ≤ 2GHz: < -55 dBc	1μHz to ≤ 250MHz: < -85dBc 250MHz to ≤ 500MHz: < -80dBc 500MHz to ≤ 1.5GHz: < -70 dBc 1.5 GHz to ≤ 2GHz: < -60 dBc
Phase Noise (1 V <sub>p-p</sub> , 10 kHz offset)	20 MHz: < -127 dBc/Hz typ. 100 MHz: < -123 dBc/Hz typ. 1 GHz: < -105 dBc/Hz typ.	
<b>Square Waves</b>		
Frequency Range	1μHz to ≤ 770 MHz	AWG–506xD: 1 μHz to ≤ 770 MHz  AWG–503xD: 1 μHz to ≤ 385 MHz
Rise/fall time (10% to 90%)	400 ps (AWG–506x/506xD) 800 ps (AWG–503xD)	
Rise/fall time (20% to 80%)	300 ps (AWG–506x/506xD) 600 ps (AWG–503xD)	
Overshoot (1 V <sub>p-p</sub> )	<2%	
Jitter (rms)	<2 ps	
<b>Pulse Waves</b>		
Frequency Range	1μHz to ≤ 770 MHz	AWG–506xD: 1 μHz to ≤ 770 MHz

<sup>4</sup> For AWG-5062/5064/5068 models the spurious are evaluated @ 1Vpp single ended nominal output amplitude. For AWG-5062D/5064D/5068D models and 5032D/5034D/5038D the SFDR is evaluated @ 1Vpp differential nominal output amplitude provided to the spectrum analyzer through a Minicircuit TC1-1-13M+ balun.



		AWG–503xD: 1 $\mu$ Hz to $\leq$ 385 MHz
Pulse width	500 ps to (Period – 500 ps) <sup>5</sup> (AWG–506x/506xD) 1 ns to (Period – 1 ns) <sup>6</sup> (AWG–503xD)	
Pulse width Resolution	20 ps or 15 digits	
Pulse duty	0.1% to 99.9% (limitations of pulse width apply)	
Leading/trailing edge transition time (10% to 90%)	400 ps to 1000 s (AWG–506x/506xD) 800 ps to 1000 s (AWG–503xD)	
Leading/trailing edge transition time (20% to 80%)	300 ps to 1000s (AWG–506x/506xD) 600 ps to 1000s (AWG–503xD)	
Transition time Resolution	2 ps or 15 digits	
Overshoot (1 $V_{p-p}$ )	< 2%	
Jitter (rms, with rise and fall time $\geq$ 400ps)	<2 ps	
<b>Double Pulse Waves</b>		
Frequency Range (Where $V_{pp} =  V_{pp1}  +  V_{pp2} $ )	1 $\mu$ Hz to $\leq$ 385 MHz: 10Vpp	<p>AWG–506xD: 1 <math>\mu</math>Hz to <math>\leq</math> 385 MHz: 6Vpp Diff. 1 <math>\mu</math>Hz to <math>\leq</math> 385 MHz: 3Vpp Se.</p> <p>AWG–503xD: 1 <math>\mu</math>Hz to <math>\leq</math> 192.5MHz: 6Vpp Diff. 1 <math>\mu</math>Hz to <math>\leq</math> 192.5 MHz: 3Vpp Se.</p>
Other Pulse Parameters	Same as Pulse Waves	
<b>Ramp Waves</b>		
Frequency Range	1 $\mu$ Hz to 75 MHz (AWG–506x/506xD)	

<sup>5</sup> Below 500 ps width, the pulse amplitude will have some reduction respect to the set value

<sup>6</sup> Below 1ns width, the pulse amplitude will have some reduction respect to the set value



	1 $\mu$ Hz to 37.5 MHz (AWG–503xD)	
Linearity (< 10 kHz, 1 V <sub>p-p</sub> , 100%)	$\leq 0.1\%$	
Symmetry	0% to 100%	
<b>Other Waves</b>		
Frequency Range		
Exponential Rise, Exponential Decay	1 $\mu$ Hz to 75 MHz (AWG–506x/506xD) 1 $\mu$ Hz to 37.5 MHz (AWG–503xD)	
Sin(x)/x, Gaussian, Lorentz, Haversine	1 $\mu$ Hz to 150 MHz (AWG–506x/506xD) 1 $\mu$ Hz to 75 MHz (AWG–503xD)	
Additive Noise		
Bandwidth (-3 dB)	2 GHz	
Level	0 V to 2.5 V - abs(carrier max value [V <sub>pk</sub> ])	0 V to 0.75 V Single Ended - abs(carrier max value [V <sub>pk</sub> ]) 0 V to 1.5 V Differential - abs(carrier max value [V <sub>pk</sub> ])
Resolution	1 mV	
<b>Arbitrary</b>		
Number of Samples	2 to 16384	
Frequency range	1 $\mu$ Hz to $\leq 770$ MHz (AWG–506x/506xD) 1 $\mu$ Hz to $\leq 385$ MHz (AWG–503xD)	
Analog Bandwidth (-3 dB)	950 MHz (AWG–506x/506xD) 470 MHz (AWG–503xD)	
Rise/fall time (10% to 90%)	400 ps (AWG–506x/506xD) 800 ps (AWG–503xD)	
Rise/fall time (20% to 80%)	300 ps (AWG–506x/506xD) 600 ps (AWG–503xD)	
Jitter (rms)	< 2 ps	



<b>Frequency Resolution</b> Sine, square, pulse, arbitrary, Sin(x)/X Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine	1 $\mu$ Hz or 15 digits 1 $\mu$ Hz or 14 digits
<b>Frequency Accuracy</b> Non-ARB ARB	$\pm 1.0$ ppm of setting $\pm 1.0$ ppm of setting $\pm 1$ $\mu$ Hz
<b>Modulations</b>	
<b>Amplitude Modulation (AM)</b> Carrier waveforms Modulation source Internal modulating waveforms Modulating frequency Depth	Standard waveforms (except Pulse, DC and Noise), ARB Internal or external Sine, Square, Ramp, Noise, ARB Internal: 500 $\mu$ Hz to 61 MHz, External: 10 MHz max. 0.00% to 120.00%
<b>Frequency Modulation (FM)</b> Carrier waveforms Modulation source Internal modulating waveforms Modulating frequency	Standard waveforms (except Pulse, DC and Noise), ARB Internal or external Sine, Square, Ramp, Noise, ARB Internal: 500 $\mu$ Hz to 61 MHz, External: 10 MHz max.
Peak deviation	DC to 2 GHz (AWG–506x/506xD) DC to 1 GHz (AWG–503xD)
<b>Phase Modulation (PM)</b> Carrier waveforms Modulation source Internal modulating waveforms Modulating frequency Phase deviation range	Standard waveforms (except Pulse, DC and Noise), ARB Internal or external Sine, Square, Ramp, Noise, ARB Internal: 500 $\mu$ Hz to 61 MHz, External: 10 MHz max. 0° to 360°





<b>Frequency Shift Keying (FSK)</b> Carrier waveforms Modulation source Internal modulating waveforms Key rate	Standard waveforms (except Pulse, DC and Noise), ARB Internal or external Square Internal: 500 $\mu$ Hz to 61 MHz, External: 10 MHz max.
Hop frequency	DC to 2 GHz (AWG-506x/506xD) DC to 1 GHz (AWG-503xD)
Number of keys	2
<b>Phase Shift Keying (PSK)</b> Carrier waveforms Modulation source Internal modulating waveforms Key rate Hop phase Number of keys	Standard waveforms (except Pulse, DC and Noise), ARB Internal or external Square Internal: 500 $\mu$ Hz to 61 MHz, External: 10 MHz max. 0° to +360° 2
<b>Pulse Width Modulation (PWM)</b> Carrier waveforms Modulation source Internal modulating waveforms Modulating frequency Deviation range	Pulse Internal or external Sine, Square, Ramp, Noise, ARB Internal: 500 $\mu$ Hz to 61 MHz, External: 10 MHz max. 0% to 50% of pulse period
<b>Sweep</b> Type Waveforms Sweep time Hold/return times Sweep/hold/return time resolution Total sweep time accuracy	Linear, Logarithmic, staircase, and user defined Standard waveforms (except Pulse, DC and Noise), ARB 30 ns to 2000 s 0 to (2000 s – 30 ns) 15 ns or 12 digits $\leq 0.4\%$
Start/stop frequency range	AWG-506x/506xD: Sine: 1 $\mu$ Hz to 2 GHz, Square: 1 $\mu$ Hz to 770 MHz



	AWG-503xD: Sine: 1 $\mu$ Hz to 1 GHz, Square: 1 $\mu$ Hz to 385 MHz
Trigger source	Internal/External/Manual
<b>Burst</b>	
Waveforms	Standard waveforms (except DC and Noise), ARB
Type	Trigger or gated
Burst count	1 to 4,294,967,295 cycles or Infinite

**Pulse Pattern Generator (PPG) Specifications – *Optional***  
 for AWG 506X/506XD models only (where X= 2,4,8)

	AWG-5062 AWG-5064 AWG-5068	AWG-5062D AWG-5064D AWG-5068D
<b>General Specifications</b>		
Operating mode	NRZ, RZ or R1 bitstream Pattern generator	
Pattern types	Clock Pattern, Custom Pattern, PRBS pattern, Go-Through Pattern, Pulse Pattern	
Run Modes	Continuous, modulation, burst (Triggered, Gated, Continuous triggered)	
<b>Internal Trigger Timer</b>		
Range	10.4 ns to 88 s	
Resolution	80 ps	
Accuracy	$\pm(0.1\%$ setting + 5 ps)	
<b>Transition Specifications</b>		



Transition peculiarity	Arbitrarily user defined transition shapes Programmable duration for any transition
Transitions types	Arbitrary, predefined
Transitions memory length	64 points
Predefined transition Shapes	Sine, Square, Pulse, Ramp_up, Ramp_down, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine
Transition duration[0-100%]	500ps to Symbol duration for Custom,PRBS and Go-Through pattern  500ps to Period/2 for Clock Pattern 500ps to (Period-500ps) for Pulse Pattern
<b>Clock Pattern</b>	
Max clock pattern frequency	750 MHz
Pattern levels	2 levels
Overshoot (1 V <sub>p-p</sub> )	< 2%
Jitter (rms)	< 2 ps
<b>Custom Pattern</b>	
Max custom pattern rate	Up to 1,5 Gbaud
Pattern levels	2, 3 or 4 levels
Predefined custom patterns	Zero, one, clock, counter
Pattern memory	Up to 2 MBit (2 levels) Up to 1 MSymbols (3 or 4 levels)
Pattern length resolution	1 bit
Min pattern length	4 bits
Overshoot (1 V <sub>p-p</sub> )	< 2%



<b>PRBS Pattern</b>	
Max PRBS pattern rate	Up to 1,5 Gbaud
Pattern levels	2 levels
PRBS types	PRBS -7,9,11,15,23,31
Overshoot (1 V <sub>p-p</sub> )	< 2%
<b>Go-Through Pattern</b>	
Max Go-Through pattern rate	Up to 1,5 Gbaud
Pattern levels	2,3 or 4 levels
Max External Pattern Rate	Up to 10Mbit/s
Overshoot (1 V <sub>p-p</sub> )	< 2%
<b>Pulse Pattern</b>	
Max Pulse pattern frequency	Up to 1 GHz
Pattern levels	2 Levels
Min Rise/Fall time (0-100%)	500 ps
Min Pulse Width	1 ns
Overshoot (1 V <sub>p-p</sub> )	< 2%
<b>Pattern Modulation</b>	
<b>Amplitude Modulation (AM)</b>	
Carrier patterns	All types
Modulation source	Internal or external
Internal modulating waveforms	Sine, Square, Triangular, Ramp_up, Ramp_down, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine, Noise, ARB
Modulating frequency	Internal: 500 μHz to 61 MHz, External: 10 MHz max.
Depth	0.00% to 120.00%
<b>Frequency Modulation (FM)</b>	
Carrier patterns	All types



Modulation source	Internal or external
Internal modulating waveforms	Sine, Square, Triangular, Ramp_up, Ramp_down, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine, Noise, ARB
Modulating frequency	Internal: 500 μHz to 61 MHz, External: 10 MHz max.
Peak deviation	DC to 300 MSymbols/s
<b>Phase Modulation (PM)</b>	
Carrier patterns	All types
Modulation source	Internal or external
Internal modulating waveforms	Sine, Square, Pulse, Ramp_up, Ramp_down, DC, Sin(x)/x, Gaussian, Lorentz, Exponential Rise, Exponential Decay, Haversine, Noise, ARB
Modulating frequency	Internal: 500 μHz to 61 MHz, External: 10 MHz max.
Phase deviation range	0° to 360°
<b>Frequency Shift Keying (FSK)</b>	
Carrier patterns	All types
Modulation source	Internal or external
Internal modulating waveforms	Square
Key rate	Internal: 500 μHz to 61 MHz, External: 10 MHz max.
Hope Symbol Rate	1uSymbols/s to 1.5 GSymbols/s for Custom and PRBS pattern 1uHz to 750 MHz for Clock pattern
Number of keys	2
<b>Phase Shift Keying (PSK)</b>	
Carrier patterns	All types
Modulation source	Internal or external




Internal modulating waveforms	Square
Key rate	Internal: 500 $\mu$ Hz to 61 MHz, External: 10 MHz max.
Hop phase	0° to +360°
Number of keys	2
<b>Burst</b>	
Patterns	All types
Type	Block mode or Bit mode
Burst count	1 to 4,294,967,295 cycles or Infinite

<b>Timing and Clock</b>	
<b>Sampling Rate</b>	
Range	<p>AWG-506x/506xD:          1 S/s Up to 6.16 GS/s          (1 S/s to 12.32 GS/S in RF mode)</p> <p>AWG-503xD:          1 S/s Up to 3GS/s</p>
Resolution	32 Hz
Accuracy	$\pm 2.0$ ppm   $\pm 500$ ppb (Opt.)
<b>Digital outputs (Optional)</b>	
<b>Output Channels</b>	
Connectors	Mini-SAS HD connector on rear panel (custom pin-out)
Number of connectors	1,2,4
Number of outputs	8-bits,16-bits,32-bits
<b>Output impedance</b>	100 $\Omega$ differential





<b>Output type</b>	LVDS
<b>Rise/fall time (10% to 90%)</b>	< 1 ns
<b>Jitter (rms)</b>	20 ps
<b>Maximum update rate</b>	1.54 Gbps per channel (AWG–506x/506xD) 750 Mbps per channel (AWG–503xD)
<b>Memory depth</b>	512M Samples per digital channel (up to 1G optional)
<b>8 bit LVDS to LVTTTL Converter Probe (Optional AT-DTLL8)</b>	
<b>Output connector</b>	20 position 2.54 mm 2 Row IDC Header
<b>Output type</b>	LVTTTL
<b>Output impedance</b>	50 $\Omega$ nominal
<b>Output voltage</b>	0.8V to 3.8V programmable in group of 8 bits
<b>Maximum Update Rate</b>	125 Mbps@0.8V and 400 Mbps@3.6V
<b>Dimensions</b>	W 52 mm – H 22 mm – D 76 mm
<b>Input Connector</b>	Proprietary standard
<b>Cable Length</b>	1 meter
<b>Cable Type</b>	Proprietary standard
<b>Proprietary Mini SAS HD to SMA cable (Optional)</b>	
<b>Output connector</b>	SMA
<b>Output type</b>	LVDS
<b>Number of SMA</b>	16 (8 bits)
<b>Cable type</b>	Proprietary standard



<b>Cable Length</b>	1 meter
<b>Auxiliary input and output characteristics</b>	
<b>Sync in/out</b>	
Connector type	Infiniband 4X connector on rear panel (custom pinout)
Master to Slave delay (typical)	TBD
<b>Marker Output</b>	
Connector type	SMA on front panel
Number of connectors	1/2/4
Output impedance	50 $\Omega$
<b>Output level (into 50 <math>\Omega</math>)</b>	
Voltage Window	-0.5V to 1.65V
Amplitude	100 mVpp to 2.15 Vpp
Resolution	1 mV
Accuracy	$\pm(5\%$ setting + 25 mV)
<b>Switching characteristics</b>	
Max Update Rate (True Arb Mode)	6.16 Gbps (AWG-506x/506xD) 3 Gbps (AWG-503xD)
Max Data Rate (True Arb Mode)	>4 Gbps @ 1Vpp swing (AWG-506x/506xD) 3 Gbps @ 1Vpp swing (AWG-503xD)
Max Frequency (AFG Mode)	96.5 MHz (continuous mode)
<b>Rise/fall time (10% to 90%, 2 Vpp)</b>	<150 ps
<b>Jitter (rms)</b>	<10 ps
<b>Marker out to analog channel skew</b>	
Range	True Arb Mode:0 to 2.3 $\mu$ s AFG Mode:0 to 11 sec. in Contin. Mode, 0 to 2.3 $\mu$ s in Trig. Mode
Resolution	True Arb Mode:



	<p>1/64 of DAC sampling period (AWG–506x/506xD) 1/32 of DAC sampling period (AWG–503xD) AFG Mode:5 ps</p>
Accuracy	±(1% of setting + 5 ps)
Initial skew	< 20 ps
<b>Trigger/Event Inputs</b>	
Connector	SMA on the Front Panel
Number of Trigger Inputs	2 (Trig.in 1, Trig.in 2)
Input impedance	50Ω / 1kΩ
Slope/Polarity	Positive or negative or both
Input damage level	< -15 V or > +15 V
Threshold control level	-10 V to 10 V
Resolution	50 mV
Threshold control accuracy	±(10% of  setting  + 0.2 V)
Input voltage swing	0.5 V <sub>p-p</sub> minimum
Minimum pulse width (1 V <sub>p-p</sub> )	3 ns
Trigger/gate input to Analog Output delay	<p><b>Slow (synchronous) trigger</b> AFG mode: &lt; 355 ns (&lt; 405 ns in triggered sweep mode) True Arb mode: &lt;1550 * DAC clock period(ns) + 10 ns</p> <p><b>Fast (asynchronous) trigger</b> AFG mode: &lt; 335 ns (&lt; 385 ns in triggered sweep mode) True Arb mode: &lt;1360 * DAC clock period(ns) + 27 ns</p>
Trigger In to output jitter (rms)	<p>AFG mode: &lt; 20 ps True Arb mode: 0.29*Dac clock period</p>
Trigger In programmable delay range	0ps to 2418ps
Trigger In programmable delay resolution	78ps



Maximum Frequency	AFG: 65 MTps on Rising/Falling Edge, 80 MTps on Both Edges True Arb mode: 1/ (Period of the Analog Waveform + 48 DAC Clock period) MTps = Mega Transitions per second
<b>Reference clock input</b>	
Connector type	SMA on rear panel
Input impedance	50 Ω, AC coupled
Input voltage range	0.2Vpp to 2Vpp
Damage level	Maximum Input voltage: -0.3V to 3.6V Maximum input power: 30 dBm (50 Ω)
Frequency range	5 MHz to 200 MHz
Frequency Resolution	1 Hz
<b>Reference clock output</b>	
Connector type	SMA on rear panel
Output impedance	50 Ω, AC coupled
Frequency	10 MHz TCXO
Initial accuracy @ 25 °C	± 1.0 ppm
Aging	± 1.0 ppm/year
Stability vs. temperature	± 1 ppm q0
Amplitude	1.65 Vpp
Phase Noise @ 20 MHz carrier	-120 dBc/Hz at 100 Hz ; -140 dBc/Hz at 1KHz;-150 dBc/Hz at 10 KHz
Phase Noise @ 100 MHz carrier(Opt.)	-120 dBc/Hz at 100 Hz ; -145 dBc/Hz at 1KHz;-150 dBc/Hz at 10 KHz
<b>External Clock Input</b>	
Connector type	SMA on rear panel
Input impedance	50 Ω, AC coupled
Frequency <sup>7</sup>	<u>True Arb</u> :

<sup>7</sup> When using the External Clock Input the SampleRate must be in the range 3.08÷6.16 GHz for AWG-506X/506XD and must be in the range 1.5÷3 GHz for AWG-503XD, with X = 2,4,8.



	<p style="text-align: center;">SampleRate / N where:</p> <p>N = 4, 8, 16, 32 and SampleRate = 3.08<sup>8</sup>÷6.16 GSps  N = 2, 4, 8, 16, 32 and SampleRate = 3.08<sup>8</sup>÷5.0 GSps</p> <p>N = 2, 4, 8, 16 and SampleRate = 1.54÷3.08<sup>8</sup> GSps  N = 1, 2, 4, 8, 16 and SampleRate = 1.54÷2.5 GSps</p> <p><u>AFG</u>: 192.5 MHz, 385 MHz, 770 MHz or 1540 MHz  (selectable)</p>
Input Power Range	+0 dBm to +10 dBm
Damage Level	15 dBm
<b>Sync Clk Out</b>	
Connector type	SMA on rear panel
Output impedance	50 Ω, AC coupled
Frequency	<p>AFG Mode:</p> <p>6.16Ghz / N where N=16, 32, 64, ..., 2048</p> <p>True Arb Mode:</p> <p>Sampling Rate/N, N=16, 32,,..., 2048 (AWG–506x/506xD)</p> <p>2 * Sampling Rate/N, N=16, 32,,..., 2048 (AWG–503xD)</p>
Amplitude	1Vpp into 50 Ohm
<b>External Modulation input</b>	
Connector type	SMA on rear panel
Input impedance	10 KΩ
Number of inputs	1
Bandwidth	10 MHz with 50 MS/s sampling rate
Input voltage range	-1 V to +1 V (except FSK, PSK).
Vertical resolution	FSK, PSK: 0V÷3.3V with 1.65V fixed threshold 12-bit

<sup>8</sup> For AWG-503xD models the max Sampling rate is limited to 3Gsps



Pattern Jump In (optional)	
Connector type	DSUB15
Input signals	DATA[0..7] + Data_Select + Load
Internal Data Width	14 bit, multiplexed using Data_Select
Number of addressable entries	16384
Data Rate	DC to 1 MHz
Input Range	VIL = 0V to 0.8V / VIH= 2V to 3.3V
Impedance	Internal 1kΩ pull-up resistor to Vcc (3.3V)





<b>Power</b>	
<b>Source Voltage and Frequency</b> <b>Max. power consumption</b>	100 to 240 VAC $\pm 10\%$ @ 45-66 Hz Max. 100W (AWG 5062/5062D/5032D) Max. 200W (AWG 5064/5064D/5034D) Max. 300W (AWG 5068/5068D/5038D)
<b>Environmental characteristics</b>	
<b>Temperature (operating)</b>	+5 °C to +40 °C (+41 °F to 104 °F)
<b>Temperature (non-operating)</b>	-20 °C to +60 °C (-4 °F to 140 °F)
<b>Humidity (operating)</b>	5% to 80% relative humidity with a maximum wet bulb temperature of 29°C at or below +40°C, (upper limit de-rates to 20.6% relative humidity at +40°C). Non-condensing.
<b>Humidity (non-operating)</b>	5% to 95% relative humidity with a maximum wet bulb temperature of 40°C at or below +60°C, upper limit de-rates to 29.8% relative humidity at +60°C. Non-condensing.
<b>Altitude (operating)</b>	3,000 meters (9,842 feet) maximum at or below 25°C
<b>Altitude (non-operating)</b>	12,000 meters (39,370 feet) maximum
<b>EMC and safety</b>	
<b>Safety</b>	EN61010-1
<b>Main Standards</b>	EN 61326-1:2013 – Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements
<b>Immunity</b>	EN 61326-1:2013



System specifications	
<b>Display</b>	7 inch, 1024x600, capacitive touch LCD
<b>Operative System</b>	Windows 10
<b>External Dimensions</b>	W 445 mm – H 135 mm – D 320 mm (3U 19" rackmount)
<b>Weight</b>	Max. 26.45 lbs (12 Kg)
<b>Front panel connectors</b>	CH N OUTPUT (SMA) where N=2,4,8 depending on the model MARKER N OUT (SMA) where N=1,2,4 depending on the model TRG IN N(SMA) where N =1,2 2 USB 3.0 ports
<b>Rear panel connectors</b>	Ref. Clk. IN (SMA) Ref. Clk. Out (SMA) Ext. Mod. IN (SMA) Sync Clk Out (SMA) Ext Clk IN(SMA) Sync IN (Infiniband 4X) Sync OUT (Infiniband 4X) Pattern Jump In (DSUB15) (AWG-5000-FSS opt. only) POD X[7..0] where X=A,B,C,D depending on the model (Customized Mini SAS HD) External Monitor ports (one or more) 2 USB 2.0 ports or more 4 USB 3.0 ports Ethernet port (10/100/1000BaseT Ethernet, RJ45 port) 2 PS/2 keyboard and mouse ports 2 DPI ports 1 DVI port
<b>Hard Disk</b>	1 TB SSD or better
<b>Processor</b>	Intel® Pentium 3.7 GHz (or better)
<b>Processor Memory</b>	32 GB or better



## Table of Available Models

Item	Description
<b>AWG5062</b>	2 CH   6.16 GS/s   2048Mpts per CH   5Vpp on 50 Ohm Single Ended Output
<b>AWG5062D</b>	2 CH   6.16 GS/s   2048Mpts per CH   1.5Vpp on 50 Ohm Differential Output
<b>AWG5032D</b>	2 CH   3 GS/s   2048Mpts per CH   1.5Vpp on 50 Ohm Differential Output
<b>AWG5064</b>	4 CH   6.16 GS/s   2048Mpts per CH   5Vpp on 50 Ohm Single Ended Output
<b>AWG5064D</b>	4 CH   6.16 GS/s   2048Mpts per CH   1.5Vpp on 50 Ohm Differential Output
<b>AWG5034D</b>	4 CH   3 GS/s   2048Mpts per CH   1.5Vpp on 50 Ohm Differential Output
<b>AWG5068</b>	8 CH   6.16 GS/s   2048Mpts per CH   5Vpp on 50 Ohm Single Ended Output
<b>AWG5068D</b>	8 CH   6.16 GS/s   2048Mpts per CH   1.5Vpp on 50 Ohm Differential Output
<b>AWG5038D</b>	8 CH   3 GS/s   2048Mpts per CH   1.5Vpp on 50 Ohm Differential Output



Item	Description
<b>Options</b>	
<b>AWG-5000-DIG8</b>	8 channel Digital license (Mini SAS cable not included)
<b>AWG5062-4G</b>	4G Memory license for AWG5062 or AWG5062D
<b>AWG5064-4G</b>	4G Memory license for AWG5064 or AWG5064D
<b>AWG5068-4G</b>	4G Memory license for AWG5068 or AWG5068D
<b>AWG5032-4G</b>	4G Memory license for AWG5032D
<b>AWG5034-4G</b>	4G Memory license for AWG5034D
<b>AWG5038-4G</b>	4G Memory license for AWG5038D
<b>AWG506x-8 DIG</b>	AWG506x-8DIG 8CH Dig license for AWG506x
<b>AWG503x-8 DIG</b>	AWG503x-8DIG 8CH Dig license for AWG503x
<b>AWG5062-WAR</b>	3 years warranty extension for AWG5062 or AWG5062D
<b>AWG5064-WAR</b>	3 years warranty extension for AWG5064 or AWG5064D
<b>AWG5068-WAR</b>	3 years warranty extension for AWG5068 or AWG5068D
<b>AWG5032-WAR</b>	3 years warranty extension for AWG5032D
<b>AWG5034-WAR</b>	3 years warranty extension for AWG5034D
<b>AWG5038-WAR</b>	3 years warranty extension for AWG5038D
<b>RIDER-AWG-SYNC</b>	Synchronization cable
<b>AWG-5062-PAT</b>	Pulse/Serial Pattern Generator (PPG) for AWG5062 or AWG5062D
<b>AWG-5064-PAT</b>	Pulse/Serial Pattern Generator (PPG) for AWG5064 or AWG5064D
<b>AWG-5068-PAT</b>	Pulse/Serial Pattern Generator (PPG) for AWG5068 or AWG5068D
<b>AWG-5000-FSS</b>	AWG-5000 Fast Sequence Switch
<b>AWG-5062-RF</b>	12.32 GS/s RF mode for AWG5062 or AWG5062D
<b>AWG-5064-RF</b>	12.32 GS/s RF mode for AWG5064 or AWG5064D
<b>AWG-5068-RF</b>	12.32 GS/s RF mode for AWG5068 or AWG5068D
<b>Accessories</b>	
<b>RIDER-AWG-SYNC</b>	Synchronization cable
<b>AT-DTTL8</b>	LVDS to LVTTTL digital adapter probe
<b>AT-LVDS-SMA8</b>	LVDS to SMA digital adapter cable
<b>GPIB / USB-TMC</b>	GPIB and USBTMC Ports for Remote Control
<b>RIDER-RACK</b>	Rackmount kit for Rider series instruments (Pulse, Func., Arb.)



SPECIFICATIONS
----------------

<b>SSD-250</b>	Additional 250GB Solid State Disk for RIDER series
<b>SSD-500</b>	Additional 500GB Solid State Disk for RIDER series
<b>SSD-1000</b>	Additional 1TB Solid State Disk for RIDER series